


MP-B501H2-I200-HPA2

22X Zoom 5" Smart AI Alert POE Network PTZ Dome Camera

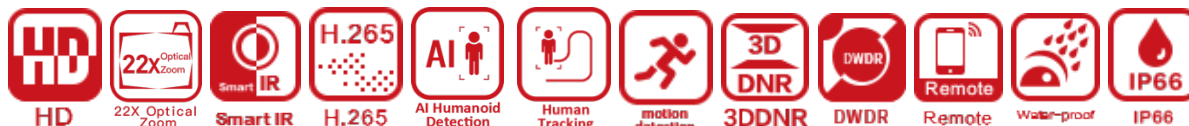

Model Number	MP-B501H2-I200-HPA2
PTZ	
Pan	Pan: 0-360 degrees continuous rotation; speed 180°/s
Tilt	Tilt:(-5) - (90°); speed 100°/s
Preset	255PCS
Line Scan	1 x AB line scan
Patrol	4
Auto Scan	1
Park Action	Preset/patrol/Auto-scan/A-B scan/patrol tracking
IR LEDs	6pcs high quality dot matrix infrared LEDs + 4pcs long-range laser infrared LEDs
IR Distance	120M
IR LEDs Control	Automatic/near light/middle light/far light/off
Video	
Image Sensor	1/2.9" color CMOS
Min. Illumination	Color: 0.01Lux @F1.2, B/W: 0.005Lux (IR Lights turn on)

S/N	≥48dB (AGC off)
video Coding	H265/H264
Resolution	2.0MP 1920 (H) X 1080(V)
Video Bit Rate	1024Kbps-4Mbps support self-adjustable as needed
Video Resolution	Main Stream: 1920x1080@25fps Sub-stream: 640x480@25fps
Audio Coding	G.711u / 64Kbps
Audio Input	Built in microphone for audio monitoring
Audio Output	Built in speaker, support voice broadcast and intercom
Lens	
Lens	22X Optical Zoom
Focal length	5.4-97.2mm
Pan View Angle	55.4 ° - 3.55 ° (wide angle - defocus)
Aperture	F1.8-F3.9
Function	
AGC	High/Mid-High/Mid/ Mid-Low/Low
WDR	Digital WDR
DNR	3D DNR
BLC	Auto
Exposure	Program mode/shutter mode (1/5-1/100000s) / support slow shutter
Number of Visitor	Main stream: 3 users; Sub-stream: 3 users
Network Protocol	TCP/IP, HTTP, NTP, IGMP, DHCP, UDP, RTSP, P2P
Compatibility	Seamless working with HIKIVISION platforms, support ONVIF 2.6
Mobile Remote Control	Support Android & iOS system mobile to access
Smart	
Humanoid Detection & Alert	Support, alert area can be customized
Humanoid Tracking	Support single preset point alert and multiple preset point patrol alert (up to 5 preset points for cruise tracking)
Voice Broadcast	Support human shape detection linkage sound alarm
Automatic Mode	Support power on action, rotation speed can be adjusted automatically according to lens multiple size
Interface	
Video Interface	RJ45 network interface
Power Supply	DC 12V/4A, POE
General	
POE Standard	IEEE802.3at
Working Temperature	-20 °C to 60 °C
Working Humidity	<90% (no frostless)
Power Consumption	Max 24W

Housing	Metal PTZ Dome
Protection	TVS4000V lightning protection, surge protection, voltage transient protection
Weather Proof	IP66
Product Size	F 258(mm)x242(mm)

USA Office Contact:

MAPESEN INTERNATIONAL INC.

Email:info@mapesen.com

Direct Line:+1 (562) 2399826

Main office:6676N.BAIN AVE

PRESNO CA 93722

P.R.C Contact:

Email:info@mapesen.com

TEL:+86 755 89345865

Direct Line:0086 755 89345865

Main Office:

B2-2,Zone B,Tweleve Oaks

